


SNAP 2™

Use anywhere power supply box. UL listed for wet, damp & dry locations

Connecting you to more.


PART# 980054C

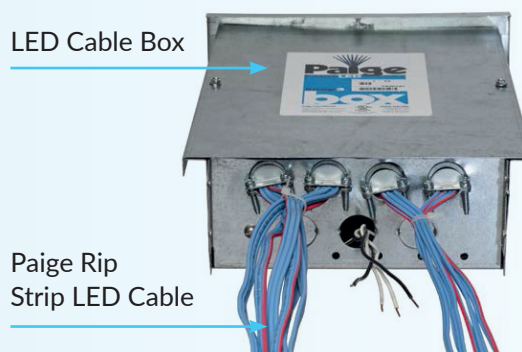

Anti-Corrosion Power Source Splice

LED Power Source

Primary Wiring

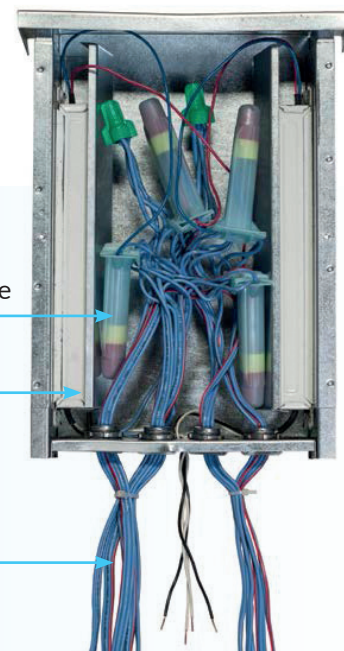

1.0 APPLICATION

1.1 This specification covers the transformer enclosure device "LED CABLE BOX" for use with LED Power supplies. Made in the USA.

2.0 CONSTRUCTION

2.1 MATERIAL

22 ga. Galvanized
2 piece box.

2.2 INSIDE DIMENSIONS

11.50" tall x 7.00" wide x
3" depth

2.3 LOWER SHELF

- 2.3.1 Eight pre-punched knock-outs.
- 2.3.2 One redrilled hole for ground lug.

2.4 INNER SIDE POWER SOURCE RECEIVING CHANNELS

- 2.4.1 Each side has a spring loaded receiving channel.
- 2.4.1 Each channel will accommodate a single power source no larger than 9.00" tall x 2" wide x 1.5" deep.

2.5 TOP OF SIDES AND BOTTOM

Pre-punched with air and condensation relief holes

2.6 FRONT COVER

Fastening holes centered so attachment can be made either direction

2.7 POWER SOURCE USAGE

Will accommodate one or two standard size LED power sources.

2.8 SURFACE PRINT

Front label, inside front cover installation instructions.

3.0 PACKAGING

- 3.1 10 to a case
- 3.2 Case size 17" x 12.5" x 17"

Important Notice: We have been asked by many sign distributors to include a 1/2 inch diameter hole/knockout in the bottom of our units for the installation of a toggle switch disconnect. Paige cannot for safety reasons and NEC Code requirements.

First, the NEC requires that the disconnect be remote from the sign and the switch disconnect all non-grounding conductors simultaneously.

Second, all competitors using toggle switches have ignored the inherent fact that, when switched off, the primary wiring is still energized within the box making it extremely dangerous for someone who has switched off the toggle switch thinking it has disconnected the primary from the unit. It has only turned off the power to the power sources not the power to the box.



200 Sheffield Street, Suite 302, Mountainside NJ 07092



908-687-7810
800-327-2443



paigesignwire.com
team@paigesignwire.com

PATENTED
No 9,472,934



E339010





Connecting you to more.

SNAP 2™

Use anywhere power supply box UL listed for wet, damp & dry locations

Powering connections

For 60+ years


By combining innovative wire and cable solutions with a service-focused approach, Paige has become the go-to provider for application-driven products. With an operating presence in more than 100 countries and seven North American locations, we have the reach to handle the most complex jobs and the expertise to customize any order to your exact needs.

Our SignWire expertise makes for the best customer experience

- Real-time order tracking and redundant facilities across the nation make for on-time delivery
- Agile operations mean we can respond and act quickly
- Our UL-listed products are specifically rated for plenum and direct burial, plus they meet UL and NEC Code.

What sets the Paige SNAP 2™ apart?

- Ability to install one (1) or two (2) power sources
- No screws required to anchor the power sources to the box
- Can be used indoors or outdoors
- Faster installation in new sign installs
- Faster replacements when maintenance is required
- Easy to separate primary wiring (120/277 VAC) from secondary wires
- Minimum of six (6) secondary knockouts plus two (2) primary knockouts
- All class 2 power sources meeting the following maximum dimensions will fit 2" wide x 1.5" deep x 9" long
- Increased number of applicable power sources

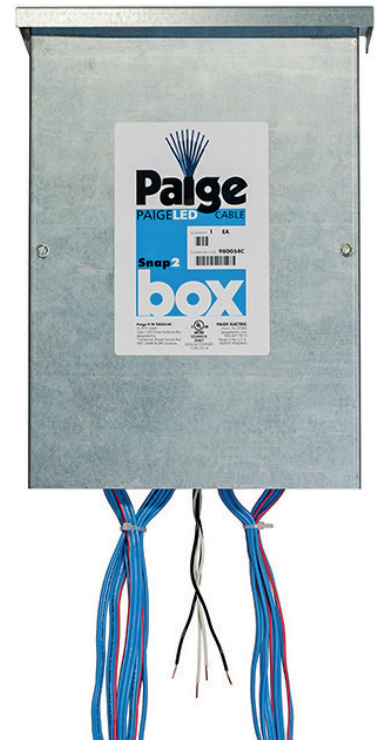

200 Sheffield Street, Suite 302,
Mountainside NJ 07092



908-687-7810
800-327-2443



paigesignwire.com
team@paigesignwire.com