




RIP STRIP® Plenum

Sunlight resistant CL3P Plenum + LED sign wire
18-2 conductor with ground

Connecting you to more.

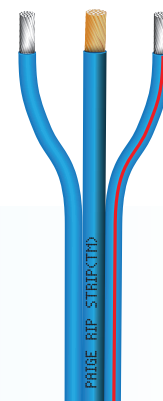

PART# 98P1814M 1,000 ft.
98P1814L 500 ft.

1.0 APPLICATION

- 1.1 Plenum LED Sign Wire, 2 conductor
18 AWG stranded tinned copper and a
14 AWG stranded bare copper conductor
75°C (UL) CL3P FT-6 Made in USA

2.0 CONSTRUCTION: COMP A

2.1 CONDUCTOR

- 2.1.1 Material: Tinned Copper
- 2.1.2 Size: 18 AWG
- 2.1.3 Stranding: 7 Strands

2.2 INSULATION

- 2.2.1 Material: Paige Compound #12056
- 2.2.2 Wall Thickness: .020" nom
- 2.2.3 Component Diameter Thickness:
.085" nom
- 2.2.4 Color Code: Light Blue + Light
Blue/Red

3.0 CONSTRUCTION: COMP B

3.1 CONDUCTOR

- 3.1.1 Material: Bare Copper
- 3.1.2 Size: 14 AWG
- 2.1.3 Stranding: 19 Strands

3.2 INSULATION

- 3.2.1 Material: Paige Compound #12056
- 3.2.2 Wall Thickness: .020" nom
- 3.2.3 Component Diameter Thickness:
.114" nom

3.2.4 Color Code: Light Blue

2.3 OVERALL DIAMETER

2.3.1 .322" nom

2.4 ASSEMBLY: (COMP A&B)

2.4.1 This is an integral construction
cable

2.5 MARKING

2.5.1 PAIGE WEATHER RESISTANT
RIP STRIP® LED PLENUM + P/N
(*SEE BELOW) CONDUIT NOT
REQUIRED E191597 14 AWG 1C
+ 18 AWG 2C 75°C (UL) CL3P
SUNLIGHT RESISTANT FT-6 "ROHS
COMPLIANT" MADE IN USA
WWW.PAIGESIGNWIRE.COM
(sequential footage markers)
*98P1814M – 1,000 ft. reel
98P1814L – 500 ft. box

2.6 TEMPERATURE/VOLTAGE

2.4.1 75°C / 300V

3.0 PACKAGING

- 3.1 P/N 98P1814M – 1000 ft. reel
- 3.2 P/N 98P1814L – 500 ft. box

4.0 STANDARD

4.1 NEC/UL compliant for all applications other
than "Wet" (direct exposure to the elements)



200 Sheffield Street, Suite 302, Mountainside NJ 07092



908-687-7810
800-327-2443



paigesignwire.com
team@paigesignwire.com

RoHS

